

GET CONNECTED, STAY CONNECTED WITH WILSON ELECTRONICS' SIGNALBOOST™ DT DESKTOP BOOSTER

Improve cellular device performance in your home or office – anywhere you need a stronger signal indoors!

- Fewer dropped connections
- Boosts multiple cellular devices simultaneously
- Works with all 800 MHz & 1900 MHz devices & carriers
- Do-it-yourself installation
- Extends cellular device battery life
- Made in USA

NOW WITH ADJUSTABLE
GAIN CONTROLS FOR
OPTIMAL COVERAGE AND
SIMPLIFIED INSTALLATION

AMPLIFIES SIGNAL
FOR BOTH VOICE
AND DATA
CONNECTIONS

 **Wilson**[®]
Electronics, Inc.

Improving Your Cellular Signal

866-294-6996 • sales@wilsonelectronics.com
www.wilsonelectronics.com

SIGNALBOOST™
DT
DESKTOP

SIGNALBOOST™ DT

Dual Band 800/1900 MHz Desktop Signal Booster



801247




FEATURES

- Amplifies signals to and from cell site
- Up to 2000 milliwatts output power
- Connects wirelessly to cellular devices
- Separate gain controls for 800 and 1900 frequency bands
- Supports multiple simultaneous connections
- FCC and IC type accepted
- Automatic cell site protections
- Universally support all 800 MHz & 1900 MHz devices

Part Number	801247
Frequency	824-894 MHz / 1850-1990 MHz
Gain	55 dB
Max Output Power	2.0 watts
Max RF (downlink)	+9.5 dBm
Noise Figure	3.5 dB nominal
Flatness	±5 dB
Isolation	> 90 dB
Power Requirements	110-240 V AC, 50-60 Hz, 8 W
Connectors	TNC Female / F-Female
Dimensions	6.2 x 4.2 x 1.5 (inch) 15.7 x 10.7 x 3.8 (cm)
Weight	0.64 lbs / 0.29 kg

INCLUDES

- Outdoor / window directional 5 dB cradle antenna
- Omni-directional inside antenna
- 50' of RG6 cable (in 20' and 30' lengths)
- All mounting hardware
- AC power supply
- Installation guide

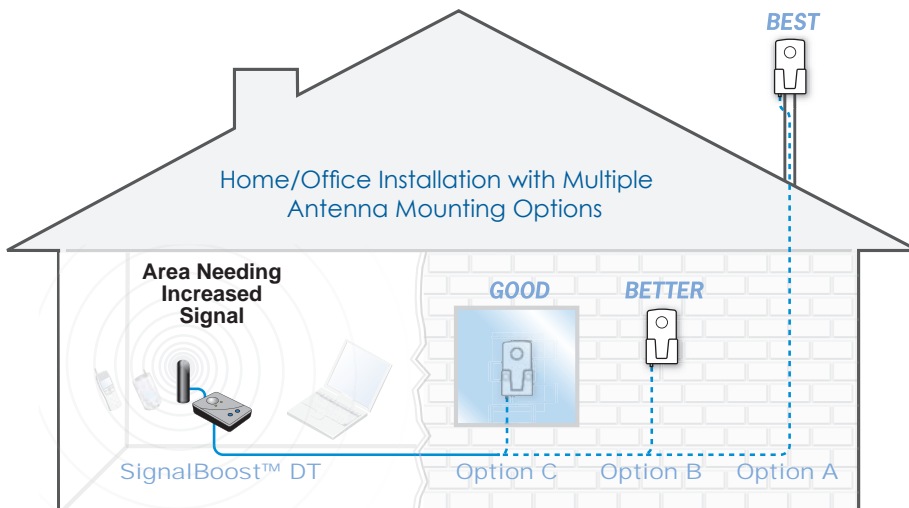

Outside Antenna Mounting Options

- GOOD Indoor window mount option
 BETTER Outdoor wall mount option
 BEST Outdoor pole mount option

